

1

2


3

4

5

6


REAR VIEW

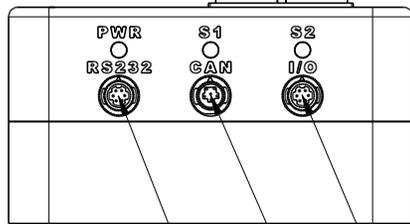

RS232
HIROSE CONNECTOR
P/N: HR30-6R-6P(71)

I/O
HIROSE CONNECTOR
P/N:HR30-6R-6P(71)

CAN
HIROSE CONNECTOR
P/N: HR30-6R-6S(71)

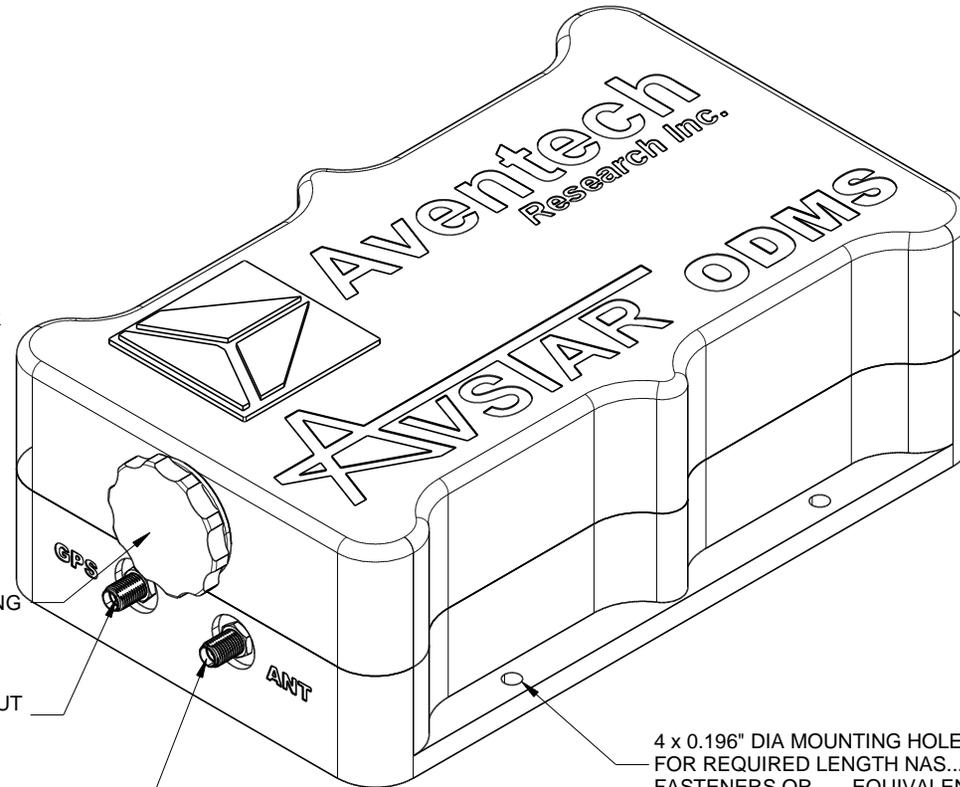

USB PORT FOR DATA LOGGING

GPS ANTENNA INPUT
SMA CONNECTOR

IRIDIUM ANTENNA INPUT
SMA CONNECTOR

4 x 0.196" DIA MOUNTING HOLES
FOR REQUIRED LENGTH NAS....
FASTENERS OR EQUIVALENT

MATERIAL: 6061-T6 ALUMINUM
FINISH: BLACK ANODIZED

TITLE AVSTAR ODMS TECHNICAL SPECIFICATIONS DRAWING				
DRAWN BY V. MANIVASAKAN	APPROVED BY B. WOODCOCK	DATE ISSUED 18 - 07 - 2013	MATERIAL SEE NOTES	FINISH SEE NOTES
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND METRIC DIMENSIONS IN BRACKETS [] TOLERANCES: TWO PLACE DECIMAL +/- 0.004 THREE PLACE DECIMAL +/- 0.001		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AVENTECH RESEARCH INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AVENTECH RESEARCH INC. IS PROHIBITED.		
DWG NO. ODMS -TSD			EDITION A	SHEET 1 OF 3

1

2

3

6