


1 2 3 4 5 6

A

A

REAR VIEW

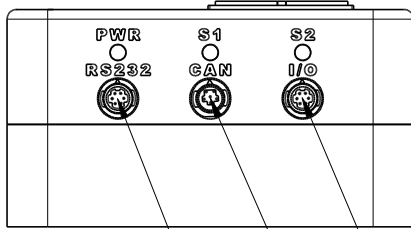


RS232 HIROSE CONNECTOR
P/N: HR30-6R-6P(71)

I/O HIROSE CONNECTOR
P/N:HR30-6R-6P(71)

CAN HIROSE CONNECTOR
P/N: HR30-6R-6S(71)

B

B

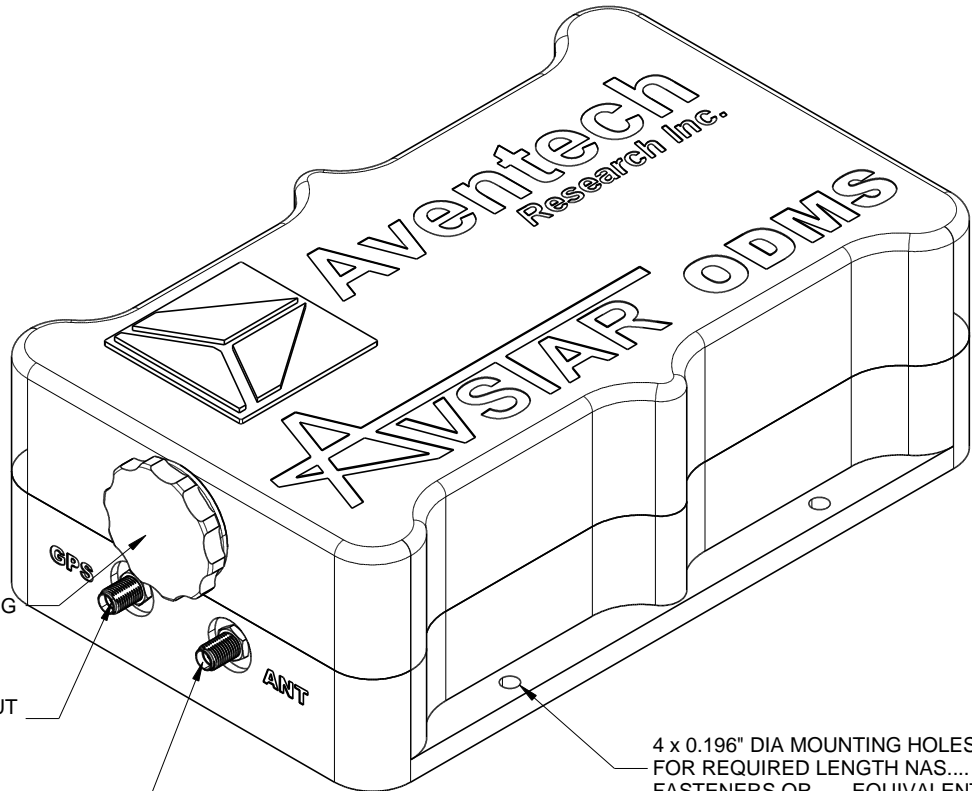

USB PORT FOR DATA LOGGING

GPS ANTENNA INPUT SMA CONNECTOR

IRIDIUM ANTENNA INPUT SMA CONNECTOR

4 x 0.196" DIA MOUNTING HOLES FOR REQUIRED LENGTH NAS.... FASTENERS OR EQUIVALENT

C

C

MATERIAL: 6061-T6 ALUMINUM
FINISH: BLACK ANODIZED

D

D

| | | | | |
|--|----------------------------|---|-----------------------|---------------------|
| TITLE AVSTAR ODMS TECHNICAL SPECIFICATIONS DRAWING | | | | |
| DRAWN BY V. MANIVASAKAN | APPROVED BY B. WOODCOCK | DATE ISSUED 18 - 07 - 2013 | MATERIAL SEE NOTES | FINISH SEE NOTES |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND METRIC DIMENSIONS IN BRACKETS [] TOLERANCES: TWO PLACE DECIMAL +/- 0.004 THREE PLACE DECIMAL +/- 0.001 | | THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AVENTECH RESEARCH INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AVENTECH RESEARCH INC. IS PROHIBITED. | | |
| DWG NO. ODMS -TSD | | | EDITION A | SHEET 1 OF 3 |

1 2 3 4 5 6